



FPGA IMPLEMENTATION OF HIGH SPEED BAUGH-WOOLEY MULTIPLIER USING DECOMPOSITION LOGIC

Ananda Kiran¹ and Navdeep Prashar²

¹Department of Electronics and Communication Engineering, Bahra University, Shimla-Hills, H.P, India

²Assistant Professor in the Department of Electronics and Communication Engineering, Bahra University, Shimla-Hills, H.P., India

Abstract

The Baugh-Wooley algorithm is a well-known iterative algorithm for performing multiplication in digital signal processing applications. Decomposition logic is used with Baugh-Wooley algorithm to enhance the speed and to reduce the critical path delay. In this paper a high speed multiplier is designed and implemented using decomposition logic and Baugh-Wooley algorithm. The result is compared with booth multiplier. FPGA based architecture is presented and design has been implemented using Xilinx 12.3 device.

Keyword

Baugh-Wooley Multiplier, Decomposition Logic, Booth Multiplier

1.INTRODUCTION

Multipliers play a pivotal role in many high performance systems such as Microprocessor, FIR filters, Digital Processors, etc. In its early stage, multiplication algorithms were proposed by Burton and Noaks in the year 1968, by Hoffman in the year 1986 and by Guilt and De Mori in the year 1969 for positive numbers. In the year of 1973 and 1979, Baugh- Wooley and Hwang proposed multiplication algorithm for numbers in two's complement form. Multiplication is hardware intensive and the main criteria of interest are higher speed, lower cost and lower power [1]. With development in technology, several researchers have tried multipliers which provide design targets such as low power consumption, increased speed, and regularity of layout or combination of them in one multiplier. This helps making them suitable for achieving compact high speed and low power implementation.

The performance of a system is generally controlled by the performance of the multiplier as the multiplier is usually the slowest element in the system. Furthermore, multiplier is normally the most area consuming element in the system. Therefore, optimizing its speed and area are vital design factors. However, area and speed are generally the conflicting constraints improving speed which results mostly in large area.

With ever increasing applications in portable equipment and mobile communications, the demand for high performance, low-power VLSI systems is gradually increasing. Digital signal processors



3.DECOMPOSITION LOGIC

The implementation of digital multiplier with decomposition logic is presented here. In this technique the multiplication process is split into smaller sub-units (smaller multipliers) and their outputs are combined to get the final result, the decomposition logic requires extra circuitry to perform the final addition of outputs attained from the smaller multiplier [7]. However, due to parallel processing, noticeable improvement in speed is achieved.

To check the performance of the multiplier structure, 8×8 multiplier structure is designed using Baugh-Wooley algorithm and the decomposition logic. Fig. 2 [7] shows an 8×8 multiplier implemented using the decomposition logic. In the first stage, four 4×4 multipliers are used to combine all the partial products, the outputs from these 4×4 multipliers are then combined in a treelike fashion to get the final results [7]. The 4×4 multiplier was implemented using Baugh-Wooley method. For 16×16 multiplication, three decomposition structures can be implemented. The first using 4×4 Baugh-Wooley multipliers, the second using 8×8 Baugh-Wooley multipliers and the third using 8×8 decomposition structure [7].

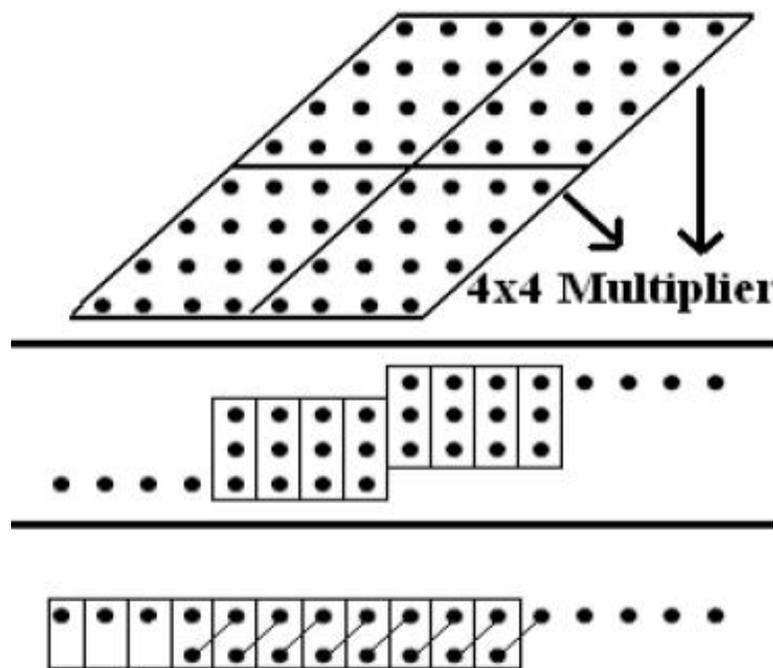




Figure 2. Decomposition structure for 8×8 multiplication

Figure 3 shows the RTL view of Baugh-Wooley Multiplier with decomposition logic.

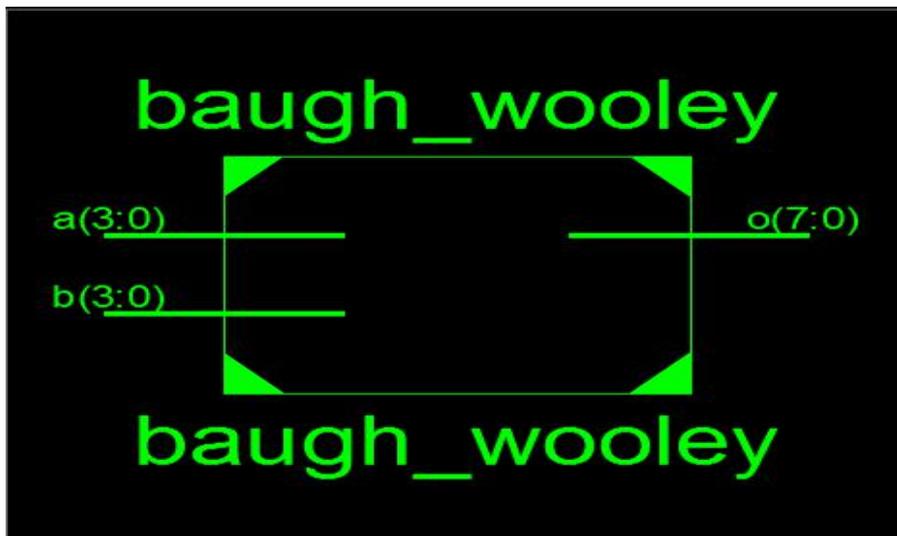


Figure 3. RTL view of Baugh-Wooley with decomposition logic

For any number of inputs one output is generated. Number of bits of the output depends on the number of bits of the inputs; e.g. in figure 3 there are two inputs of 4 bits the output will be of 8bits.



4.SIMULATION AND RESULT

The code of Baugh-Wooley multiplier and decomposition logic is written in VHDL and simulated using ISim (VHDL/Verilog). The proposed architecture is implemented on Virtex6 xc6vlx75t-3-ff484 device using XILINX 12.3. Table 1 shows the device utilization summary of Baugh-Wooley multiplier using decomposition logic.

Table 1. Hardware Device Utilization Summary

S. NO.	Logic Utilization	Used	Available
1	No. of bonded IO	16	240
2	No. of slice LUTs	13	46560
3	No. of occupied slices	6	11640

4.1 Comparison of present work, Baugh-Wooley multiplier and decomposition logic with the previous work

Present work is implemented on Virtex6 xc6vlx75t-3-ff484 device. Thus, finally comparison of present work with previous work is done as shown in Table 2. The simulation results for 8×8 multipliers are summarized in Table 2. For the 8×8 multiplier structure, the Baugh-Wooley method and decomposition logic show an improvement in delay compared to Booth multiplication method due to parallel processing of data.

Table 2. Comparison of present work with the previous reference paper

8×8 Multiplier	Booth Multiplier [13]	Baugh-Wooley
Path Delay	15.345ns	10.516ns
No. of bonded IO	36	32
Total real time to Xst completion	12.00secs	6.00secs
No. of slice LUTs	190	13
Average fanout	4.00	3.43
Maximum Frequency MHz	65.16	95.09

From Table 2, it is clear that present design shows an improvement in speed with reduction in used resources on target device.



5.CONCLUSION

In this paper, decomposition logic is implemented with Baugh-Wooley multiplier which shows the better results in terms of path delay and speed. The design operates on maximum frequency of 95.9MHz. The considerable increase in speed make the design suitable for many high performance system such as Digital Signal Processors, FIR filters, Microprocessors etc. The above results show that the Baugh-Wooley Multiplier with decomposition logic is higher in speed as compared to the Booth Multiplier and process the inputs fast to produce the result.

REFERENCES

- [1] IndrayaniPatle, AkanshaBhargav, Prashant Wanjari, "Implementation of Baugh-Wooley Multiplier Based on Soft-Core Processor", IOSR Journal of Engineering (IOSRJEN), Vol. 3, Issue 10, 2013.
- [2] Hsin-Lei Lin, Design of a Novel Radix – 4 Booth Multiplier, the 2004 IEEE Asia – Pacific Conference on Circuit and Systems, December 2005
- [3] IndrayaniPatle, AkankshaBhargav, Prashant Wanjari, "Implementation of Baugh-Wooley Multiplier Based on Soft-Core Processor", IOSR Journal of Engineering, Vol. 3, Issue 10, Oct. (2013).Based on Soft-Core Processor", IOSR Journal of Engineering, Vol. 3, Issue 10, Oct. (2013).
- [4] Jashin Mathews Joseph and V. Sarada, "Reconfigurable High Performance Baugh-Wooley Multiplier for DSP Application", ITSI Transaction on Electrical and Electronics Engineering, Vol. 1, Issue 4 (2013).
- [5] C. R. Baugh and B. A. Wooley, "A two's complement parallel array multiplication algorithm," IEEE Trans Comp., vol. C-22, no. 12, pp. 1045-1047, Dec. 1973.
- [6] SudhakarAswathy and D. Gokila,"High-Speed Power-Efficient Modified Baugh-Wooley Multipliers".
- [7] Sundeepkumaragarwal, PalaniappanRamanathan, PonnisamyThangapandianVanathi" High Speed Multiplier Design Using Decomposition Logic" Serbian Journal of Electrical Engineering Vol. 6, No. 1, 2009 33-42.
- [8] MicroBlaze Processor Reference Guide Embedded Development Kit EDK 13.1, www.xilinx.com
- [9] C. H. Chang, J. Gu, M. Zhang: A Review of 0.18 μ m Full Adder Performances for Tree Structured Arithmetic Circuit, IEEE Transaction on Very Large Integration Systems, Vol. 13, No. 6, 2005, pp. 686-695.
- [10] Y.N. Ching, "Low-Power high-speed multipliers", IEEE Transactions on Computers. pp, 1196-1200, Nov. (2005).
- [11] Sandeep Shrivastava, Jaikaran Singh and Mukesh Tiwari, "Implementation of Radix-2 Booth Multiplier and Comparison with Radix-4 Encoder Booth Multiplier", SSSITS Sehere, (M.P.), Feb. (2011).
- [12] K. Hwang, Computer Arithmetic: Principles, Architecture, and Design. John-Wiley, 1979.
- [13] Laxman S. DarshanPrabhu R, Mahesh S Shetty, Mrs Manjula BM, Dr.Chirag Sharma, "FPGA Implementation of Different Multiplier Architectures", International Journal of Different Multiplier Architectures, Vol. 2, Issue 6, June 2012.
- [14] NavdeepPrashar and Balwinder Singh, "FPGA Implementation of Pipelined CORDIC Sine Cosine Digital Wave Generator", CS & IT 05, pp. 435-440,© CS & IT-CSCP 2012.



Authors Biography

NavdeepPrashar has obtained his Bachelor of Technology degree from the CT Institute of Engineering, Management and Technology, Jalandhar affiliated to Punjab Technical University, Jalandhar in 2010 and Master of Technology degree from Centre for Development of Advanced Computing (CDAC), Mohali.He is currently serving as Assistant Professor in Bahra University, Wagnaghat,Solan, H.P., India. He has 3+ years of teaching experience to both undergraduate and postgraduate students. Mr. Prashar has published one book and presented many papers in the International &National Journals and Conferences. His current interest includes Embedded Systems, VLSI Design & Testing, Low Power techniques, and System on Chip.



AnandaKiran has obtained her B.Tech. (Electronics and Communication Engineering) degree from the LR Institute of Engineering and Technology, Solan affiliated to Himachal Pradesh University, in 2013, and presently she is doing M.Tech. (Electronics and Communication Engineering) degree from Bahra University, Wagnaghat. At present, she is working on her M. Tech. (Electronics and Communication Engineering) thesis. Her area of interest is Embedded Systems, VLSI Design and Digital Signal Processing.

